

Energy Balance Development in a Cogeneration with Biogas for H₂ Production by Catalytic Reforming

Irma Paz Hernández Rosales¹, Arturo Fernández Madrigal¹, Luz García Serrano²

¹Centro de investigación en Energía, UNAM, Apto. Postal 34, 62580 Temixco, Mor. MEXICO

²Universidad Autónoma Metropolitana – Av. San Pablo Núm. 180, Col. Reynosa Tamaulipas, C.P. 02200, México D.F.

¹Tel. (0155)56229705, Fax (0155)56229742, iphr@cie.unam.mx

ABSTRACT

The main objective of this research was to carry out technically a mass and energy balances in an energy cogeneration plant with cattle excrement having biogas + natural gas as a fuel. It was used like raw material for hydrogen production.

Also to evaluate the economic pre-feasibility of the steam reforming plant using GN and Biogas + GN mixture fuels. An analysis of an electric energy cogeneration plant was carried out; this plant used biogas and GN. Based on these fuels, an industrial significant scale for this research was fixed, as a consequence an installed power of 75 MW was selected. Mass and energy balances were carried out over this installed power.

1 INTRODUCTION

Hydrogen can be produced in big amounts starting from primary energy sources such as fossil fuels (coal, petroleum or natural gas), different intermediaries (refinery products, ammonia and methanol) and alternative sources like biomass, biogas and waste materials. Water steam reform of natural gas represents approximately three quarter of the total hydrogen production. The process is based on the water steam reaction and the high- temperature methane over a catalyst. Other gases that have hydrocarbons are also suitable for the hydrogen production, such as different gases (biogas) coming from the biomass and waste anaerobe fermentation. [1,2,3]


A project that has the hydrogen production by the gas reforming, as a product of the biomass decomposition, is the example of the cogeneration plant in Tizayuca Hidalgo. The object of this plant is to obtain biogas, organic fertilizer and a water treatment plant. However it is also possible to obtain hydrogen by catalytic reform starting from biogas obtained from the cattle excrement wastes; as a consequence the biogas plant energy balance

will be perform, this balance will start from the plant process that will have the following stages: cattle excrement accumulation, anaerobe treatment digestores, liquid/solid

separation, biogas production, motors and thermal recovery to give us electricity and heat. These results will permit us to determine by the biogas reforming the hydrogen quantity that was produced. It can be used as a fuel for the cogeneration equipment motors.

2 BIOMASS

In this research the following **Buswell** equation for the excrement biological reaction was used:



In the natural process the production is 60-70 by 100 CH₄ and 40-30 by 100 CO₂. It is constant basically for each type of biomass. This final gaseous product of the reaction is commonly named biogas. [7]

3 STEAM REFORMING

Steam reform is the common method to produce gases enriched in hydrogen. Methane, main component of the natural gas, reacts with steam according to the following equilibrium [8,9,10]:



3.1 Reforming by Natural Gas, Biogas (methane) and GN + Biogas mixture

This section shows that starting from choosing the steam reforming process for hydrogen production, the energy balances will be used starting from three possibilities of fuels to know about the hydrogen production. It will be possible with the characteristics of the plant and of the reformer.

Fig 3.1 shows three possibilities of fuels in the steam reformer using the Tizayuca plant diagram. In this figure the steam reformer is added to produce hydrogen starting from three possibilities of fuels to develop material and energy balances; table 3.1 gives the calculation of the percentages that will be used in the RV.

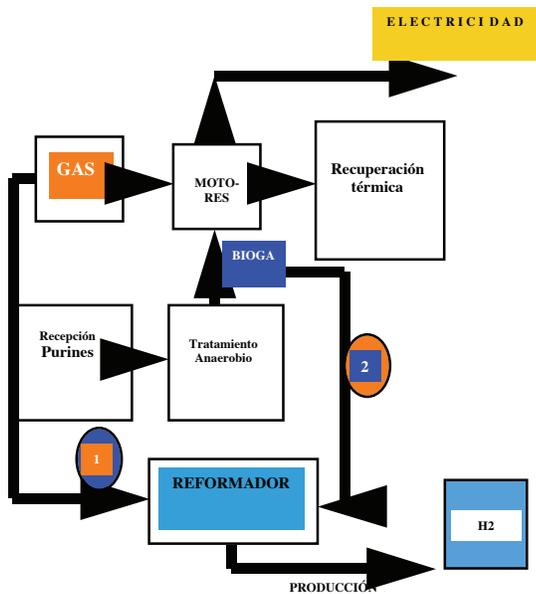


Fig. 3.1 Diagram of the different fuels for feeding RV to produce hydrogen in the Tizayuca Plant.


Table 3.1 Percentages of the compositions fuels.

	GN	Biogás	Mezcla Biogás + GN
Composición original (ton/d)	10.14	70.2	80.34
Composición original (m ³ /d)	13170	58,500	71670
%	18.38	81.62	100

4 MASS AND ENERGY BALANCE RESULTS


We consider a global mass and energy balance of the steam methane reforming plant in a stationary state.

1. Reforming (molar)




$$\Delta H_R = 15.8 \left[\frac{MJ}{kg_{CH_4}} \right]$$

2. Combustion (molar)




$$\Delta H_R = -55 \left[\frac{MJ}{kg_{CH_4}} \right]$$

When the mass and energy balance is performed for the steam methane reforming plant, the following reactions in a mass base are (kg).



The one estequiometricamente molar is to:



4.1 Balance analysis

When we had the composition of the excrement reaction, we developed the mass and energy balance where we obtained, after developing a mass and energy balance in a stationary state, the following global process result expressed in molar terms (volumetric): the first and third hypotheses gave the same result, 3.120 mol of hydrogen and 2.184 mol of hydrogen with regard to the second one. In conclusion biogas can be a fuel for the steam reforming process that can produce the same hydrogen quantity; also it can be produced using 100% of GN.

According to the excrement quantity used in the plant, it will be required a double increase of the quantity. As a result the steam reforming plant will work with 100% of biogas as a fuel. It is also important to mention that this biogas can be richer with regard to its calorific heat if different excrement mixtures are used such as excrements of pigs, cows and organic wastes. This is an important fact that can be part of later researches.

5 ECONOMIC EVALUATION

It was possible to calculate the following economic indicators, VPN and TIR because of the balances.

Table 5.1 Economic indicators that were obtained for the steam methane reforming process.

	RV	RV
	100% GN	70%Biogás + 30%GN
VPN (miles de US\$)	\$885.292	924.557
TIR	152%	152%

The balanced generation cost is the quotient of VPN cost and VPN of electricity production.

Costo nivelado de generación US\$/kW	RV	RV
	100% GN	70%Biogás + 30%GN
	4.066	1.539

The one that emerged for biogas + GN mixture is 2.64 times smaller, regarding to the generation balanced cost.

5.1 Economic evaluation analysis

By the economic evaluation we have that the net present value VPN is bigger than zero in both cases, this is because of the investments costs, therefore they are part of the same magnitude. In conclusion the project is profitable. The internal rate of rebate is bigger than the deduction rate (9%); it is totally possible to obtain great benefits using biogas (methane) as a fuel in the steam reformer.

The main difference in the project profitabilities is because of the changeable costs. Using biogas (methane) as a fuel only the water process costs, cooling water and electricity have an influence, the raw material costs are reduced in a 70% because only 30% of GN is used.

6 CONCLUSION

It is technically feasible to operate a combine biotechnological plant of hydrogen production with the biogas properties and the mass and energy balances under the used conditions.

The biogas is generated starting from a solid waste quantity (excrement); when it is used as a fuel in a steam reformer we get the following mass and energy balance percentages for the hypotheses used in this work:

- First hypothesis: 100% of GN we obtain 99% of hydrogen.
- Second hypothesis: 100% of biogas we obtain 70% of hydrogen.
- Third hypothesis: a mixture of biogas + 30% of GN we obtain 99% of hydrogen.

It is feasible to use a biogas + GN mixture with regard to the economic evaluation since the hydrogen production costs by the steam methane reforming technology using as a fuel the biogas + GN mixture is cheaper; from the order of **US\$0.1994 kg H₂**, in comparison with the hydrogen production costs using GN of the order of **US\$0.469 kg H₂** as a fuel. As a result we get in both cases an annual production of **29.683.500 kg/year** of H₂.

The result obtained for the biogas + GN mixture regarding to the generation balance costs is = **US\$1.539/kW** and the one of GN is =**US\$4.066/kW**. The first one is 2.64 times smaller.

This result proves that it is attractive, for the businessman, to invest in this type of combined biotechnological plants.

REFERENCES

- [1] Gaudemark, B. and Lynum, S. Hydrogen production from natural gas without release of CO₂ to the atmosphere. Florida, USA, Proceedings of the 11th World Hydrogen Energy Conference, 1996, p.511-523.
- [2] Manuales sobre energía renovable: Biomasa/ Biomasa.Users Network (BUN-CA). -1 ed. -San José, C.R. : Biomass Users Network (BUN-CA), 2002. p. 42 - 54
- [3] Houghton J. T. Climate Change 2001: The Scientific Basis. Contribution of Working Group I to the Third Assessment Report of the Intergovernmental Panel on Climate Change. Cambridge Univ. Pr., 2001, p.125-175.
- [4] IPCC. Climate Change 1995: Scientific-Technical Analyses of Impacts, Adaptations, and Mitigation of Climate Change. Cambridge University Press, Cambridge, UK and New York, NY, USA, 1996, p. 235-267.

- [5] FAO-WETT. Wood energy information in Africa: Review of TCDC Wood Energy country reports and comparison with the regional WETT study. Rome, Food and Agriculture Organization, 2002 of the UN: 61.
- [6] OLADE (organización latinoamericana de energía). Biogás energía y fertilizantes a partir de desechos orgánicos. México 1994, p.7-65.
- [7] Antonio Alonso Concheiro y Luis Rodríguez Viqueira. Biomasa, Alternativas Energéticas CoNaCyT y el Fondo de Cultura Económica 1985. p.175
- [8] Biogás.
<http://www.ingenieroambiental.com/Biogas>
<http://www.roseworthy.adelaide.edu.au/~pharris/biogas/beginners.html>
<http://www.fao.org/ag/aga/agap/frg/Recycle/biodig/manual.htm>
<http://www.hcm.fpt.vn/inet/~recycle>
- [9] Borda Bremen. Biogas plants, building instructions. German Appropriate Technology Exchange, Germany, 1998. p. 225-236
- [10] Information and advisory service on appropriate technology. Biogas Digest. Biogas Basics. 2004. Volume I.
<http://www5.gtz.de/gate/id/Download.afp?PubName=../publications/BiogasDigestVol1.pdf>, 12 de abril de 2004.
- [11] Evaluación de mezclas de estiércol de bovino y esquilmos vegetales para obtención de biogás por fermentación anaeróbica. Informe IIE/FE-A2/12. Instituto de investigaciones Eléctricas. Cuernavaca, Mor., México. Junio, 1979.
- [12] Information and advisory service on appropriate technology. gtz project. *Biogas Digest. Volume II. Biogas – Application and Product Development.* <http://www5.gtz.de/gate/id/Download.afp?PubName=../publications/BiogasDigestVol2.pdf>, 12 de abril de 2004
- [13] Gavaldá Oguiu E. Viabilidad técnico-económica del aprovechamiento energético del biogás producido por codigestión de purines de cerdo. Aplicación a una granja de 5000 cerdos situada en Catalunya. Proyecto de final de carrera, Escuela Técnica Superior de Ingenieros Industriales de Catalunya, Universidad Politécnica de Catalunya. 2000.
- [14] German federal ministry for economic cooperation and development (gtz). Naturgerechte technologien, bau- und wirtschaftsberatung (tbw) GmbH : Anaerobic Processes for the treatment of Municipal and Industrial Wastewater and Waste. An Overview.
- [15] Ministerio de Economía, Dirección General de Política Energética y Minas. Planificación y desarrollo de las redes de transporte eléctrico y gasista 2002-2011.
<http://www.mineco.es/transporteelectricoygasista>, 15 de julio de 2000